Getting Started

Getting Started with butt - broadcast using this tool

Install *butt* - broadcast using this tool

For this guide we'll be using butt. You can download butt from their [website](#).

Configure *butt*

1. Launch butt
2. Click "Settings" to open the settings dialog

3. Under the "Server" section, click the "Add" button.
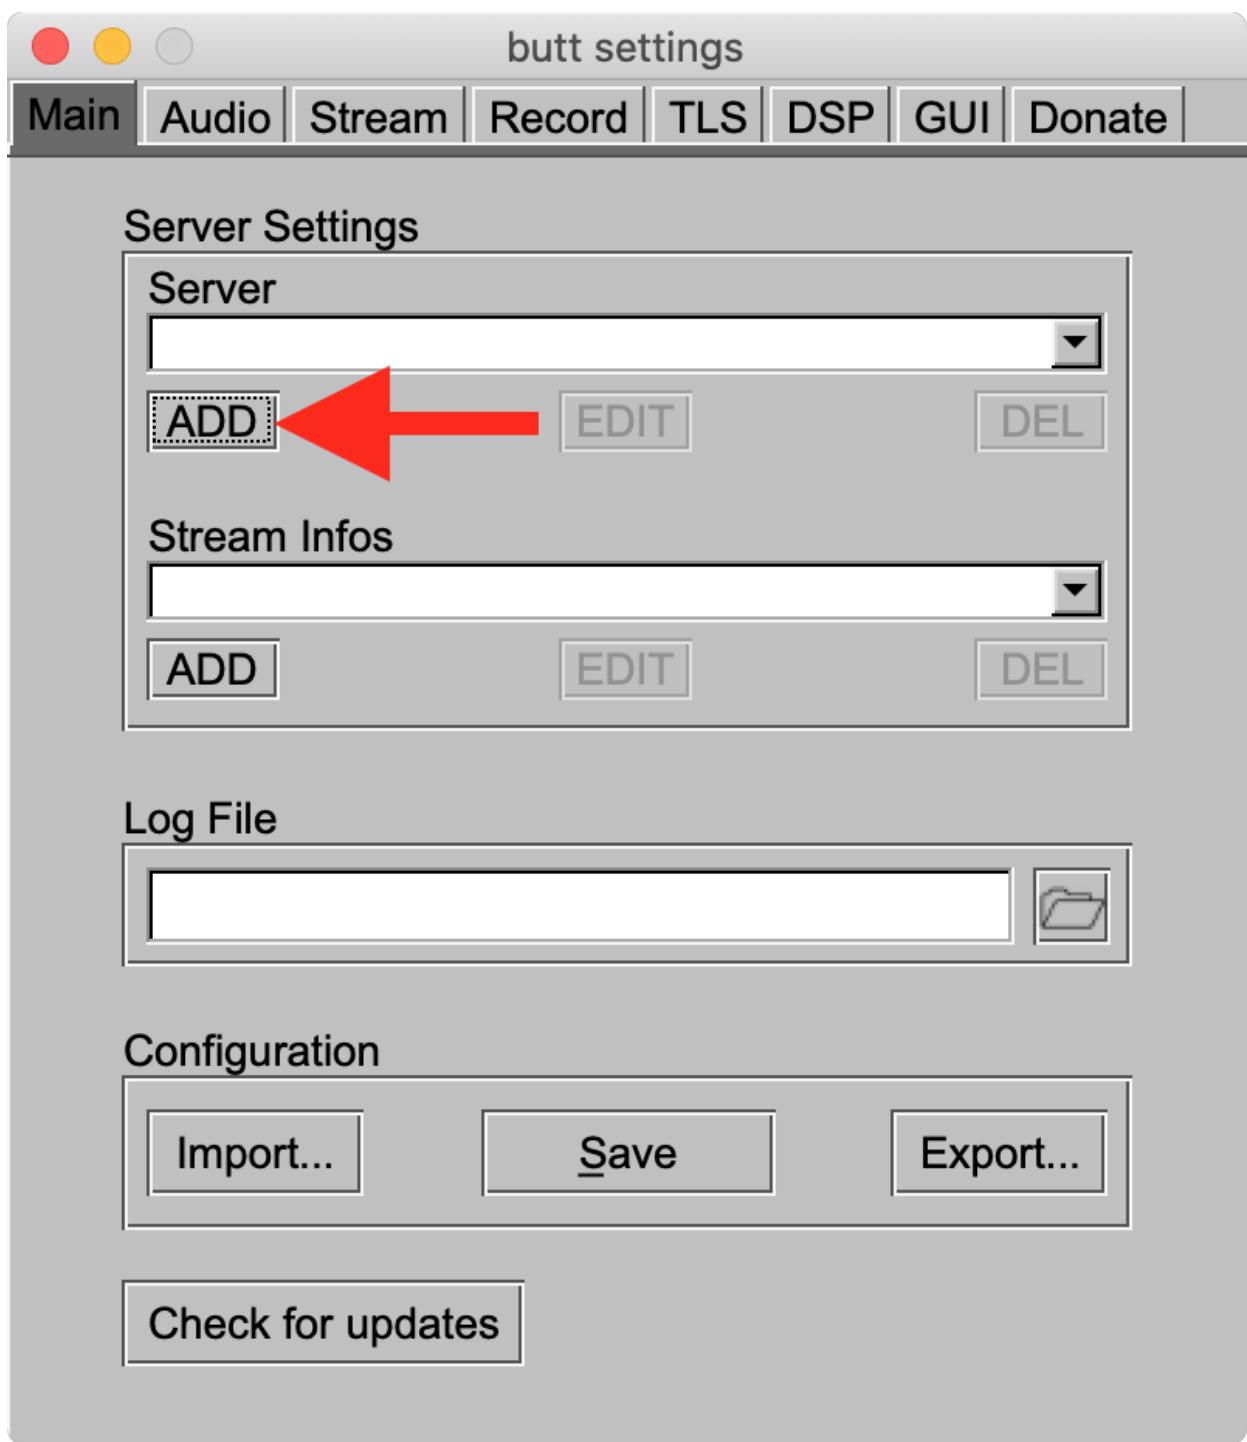
Getting Started

4. Set the server type to Icecast and enter your server details. Enter your first "Server Port" into the "Port" box. For example, if your "Server Ports" section says "7000, 7001 (SSL)", you would enter 7000 as your port. When you're done, press "Add".

Getting Started

Add Server

Name:

VosCast Stream

Type

○ ShoutCast

◉ IceCast

SSL/TLS

☐ Use SSL/TLS

Revoke certificate trust

Address:

s1.voscast.com

Port:

7000

Password:

••••••••••••••••

Show

IceCast mountpoint:

stream

IceCast user:

source

Cancel

ADD

5. Under the "Stream Infos" section, click the "Add" button.
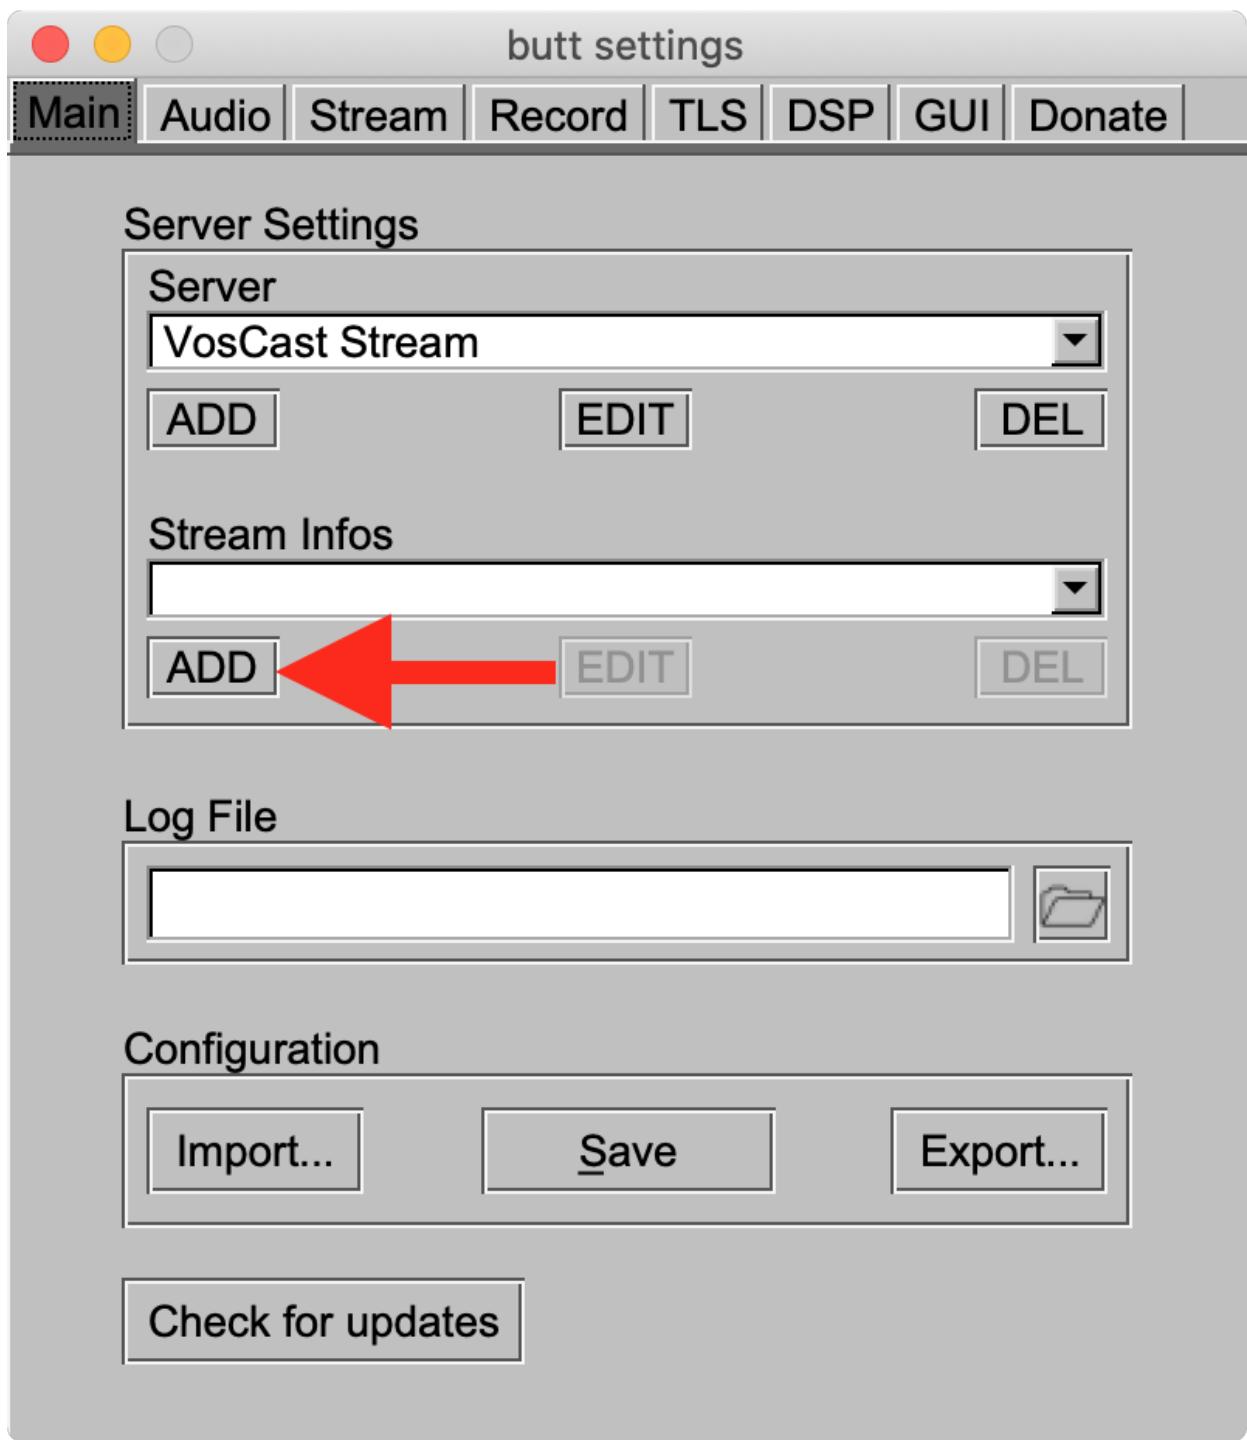
Getting Started

6. Enter your station name and details. When you're done, press "Add".

Add Server Infos

Name:

Station Name

Description:

The best station

Genre:

Jazz

URL:

https://voscast.com

ICQ:

IRC:

AIM:

☐ Make server public

Cancel

ADD

7. Go to the "Audio" tab, select the audio device you want to stream, and set your bitrate. For most people, the default device is the device you should select.

Getting Started
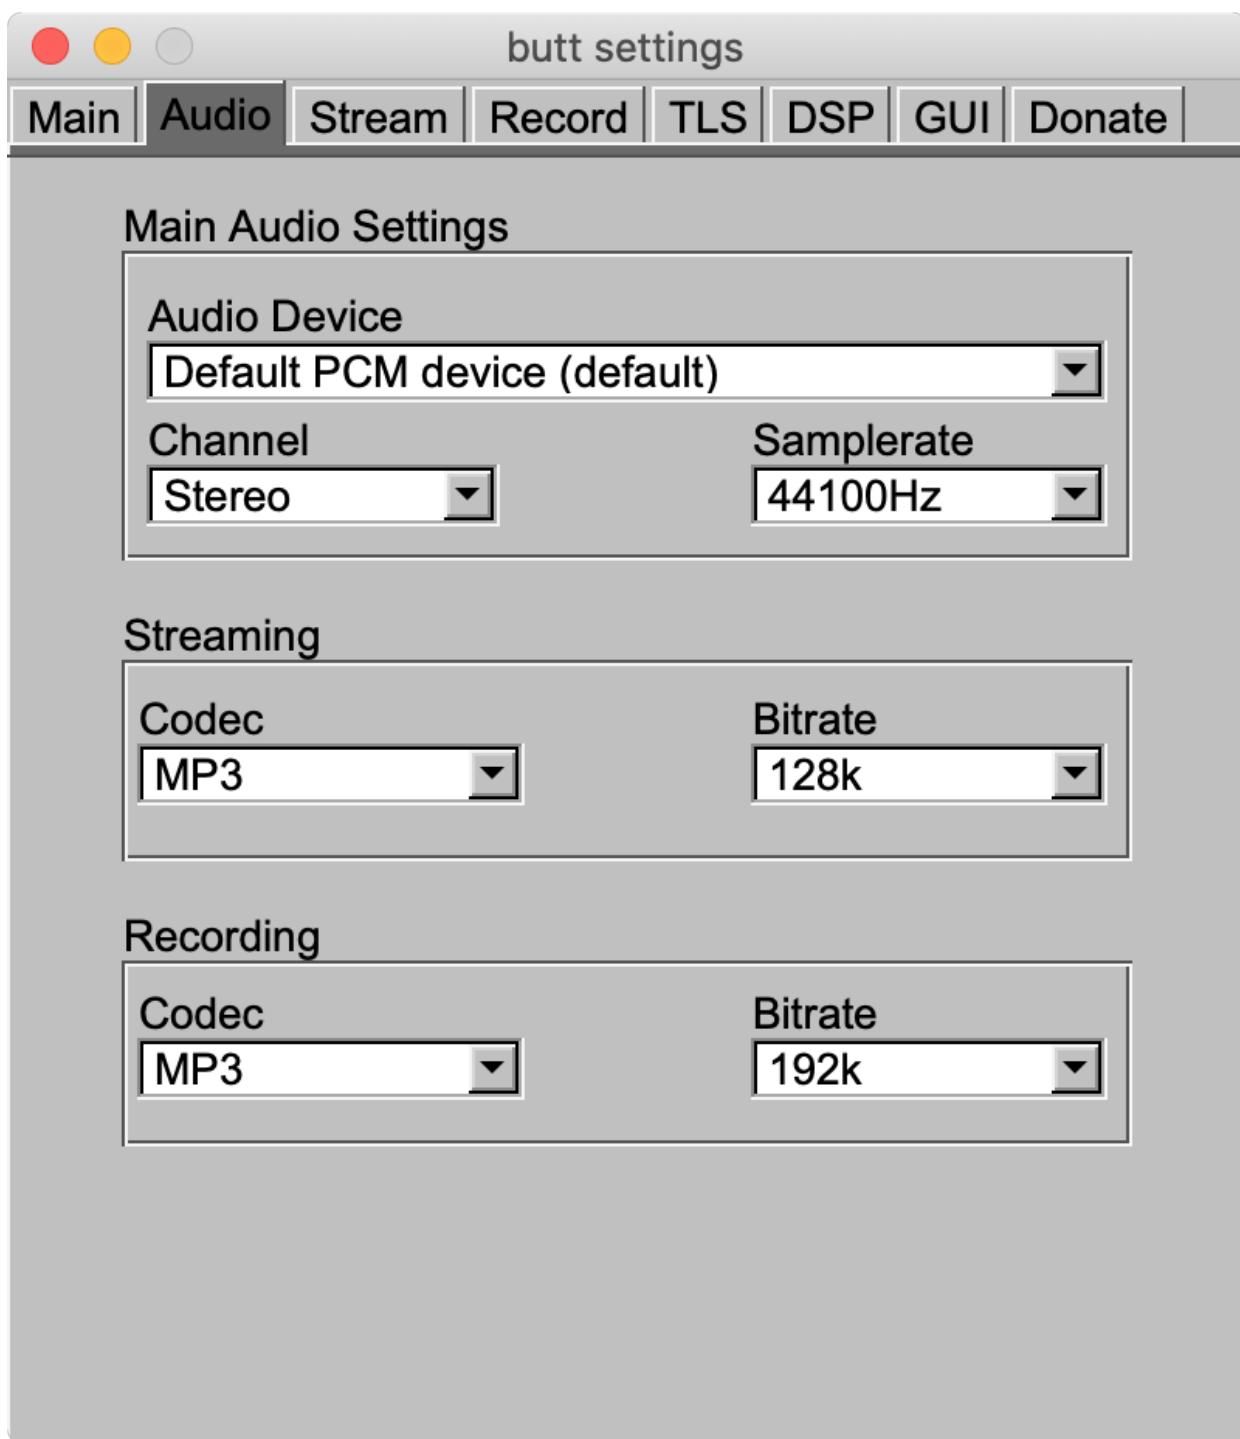
8. Go to the "Stream" tab and choose how you want titles set. The option you choose will depend on what you're broadcasting, so choose the best option for your needs.

Getting Started
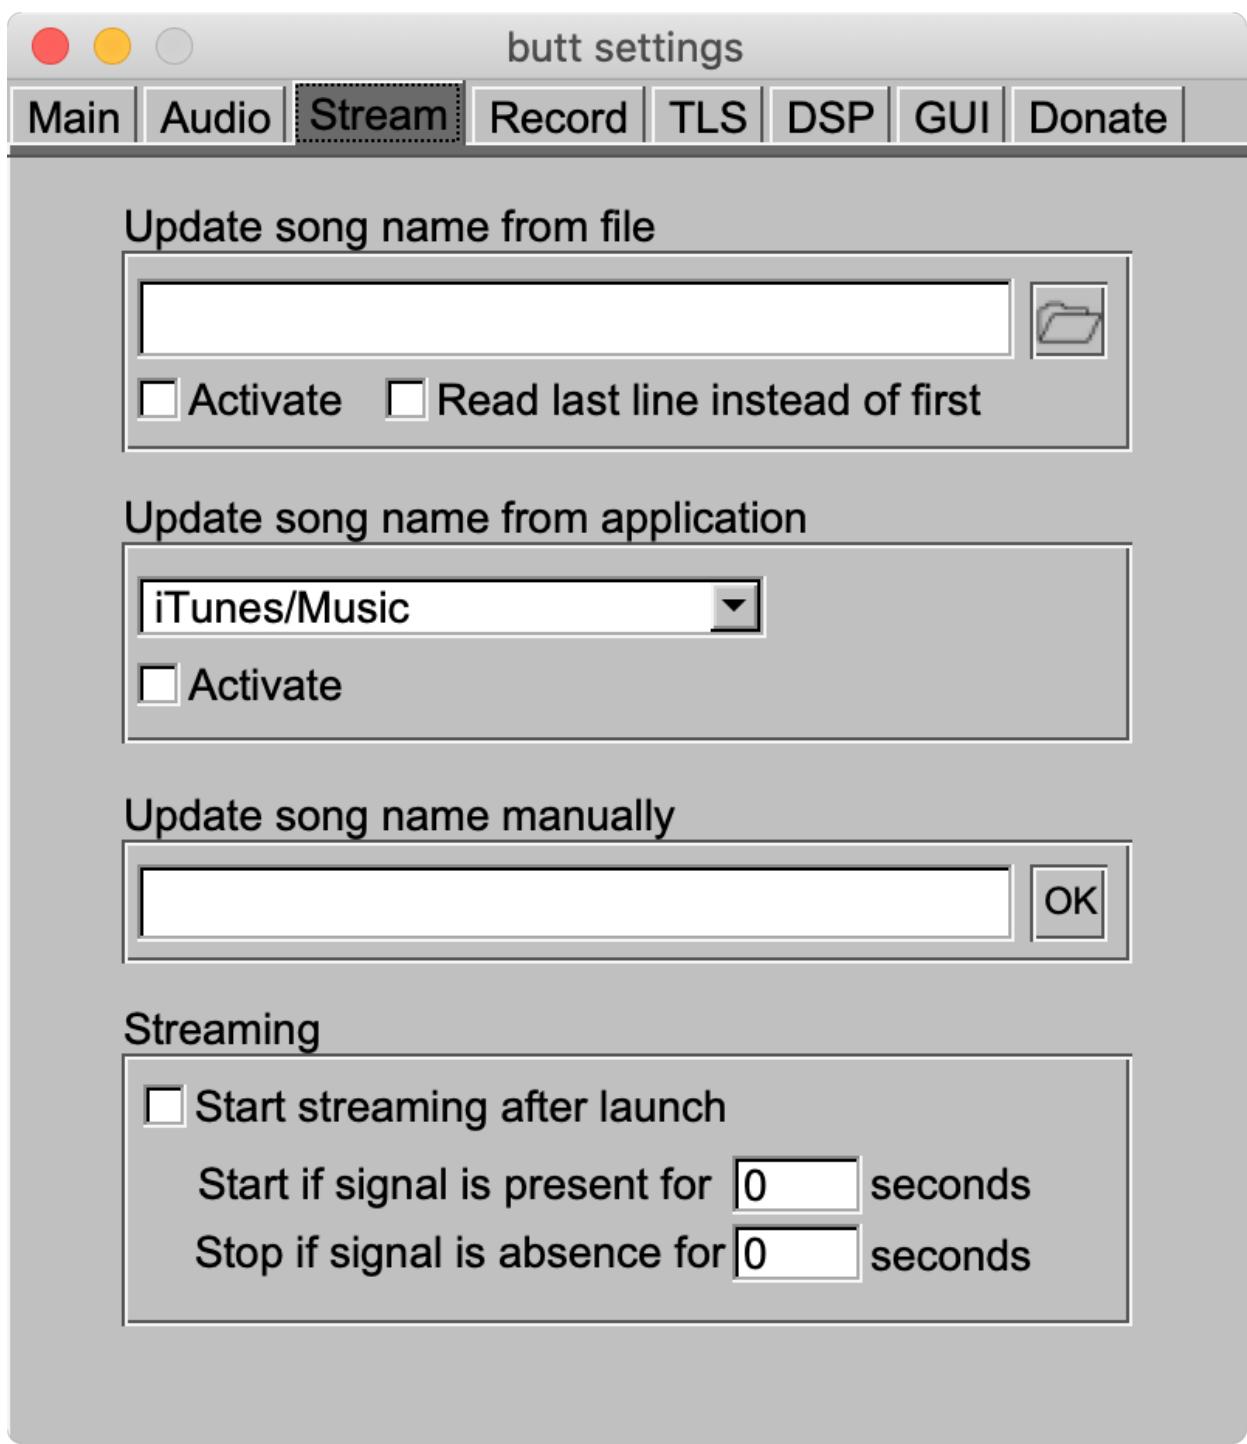
9. Click the play button to begin broadcasting.

Getting Started

idle

R ●●●●●● ●● ●
-50 30 20 12 4 0 +1 3 6
L ●●●●●● ●● ●

Settings ▶

Less ▲

-24dB ⬛ +24dB

```
22:15:
Starting butt 0.1.22
Written by Daniel Nöthen
iOS client: https://izicast.de
Donate: paypal@danielnoethen.de

Reading config /Users/joseph/.buttrc
```

Unique solution ID: #1017
Author: Bryan
Last update: 2020-07-21 17:02